

F

E

D

C

B

A

F


E

D



C

B

A

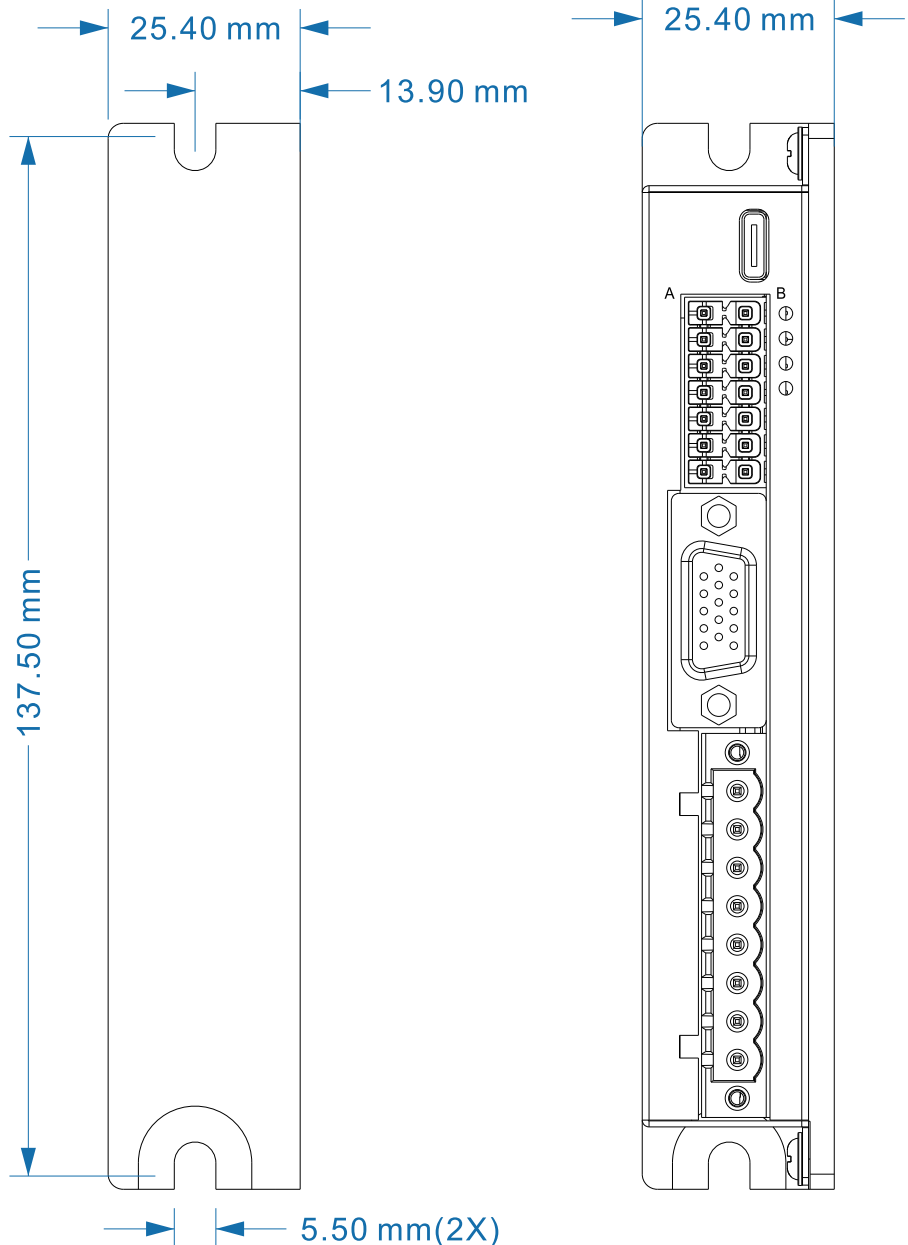

Hole position
for fixation
(孔位固定尺寸)

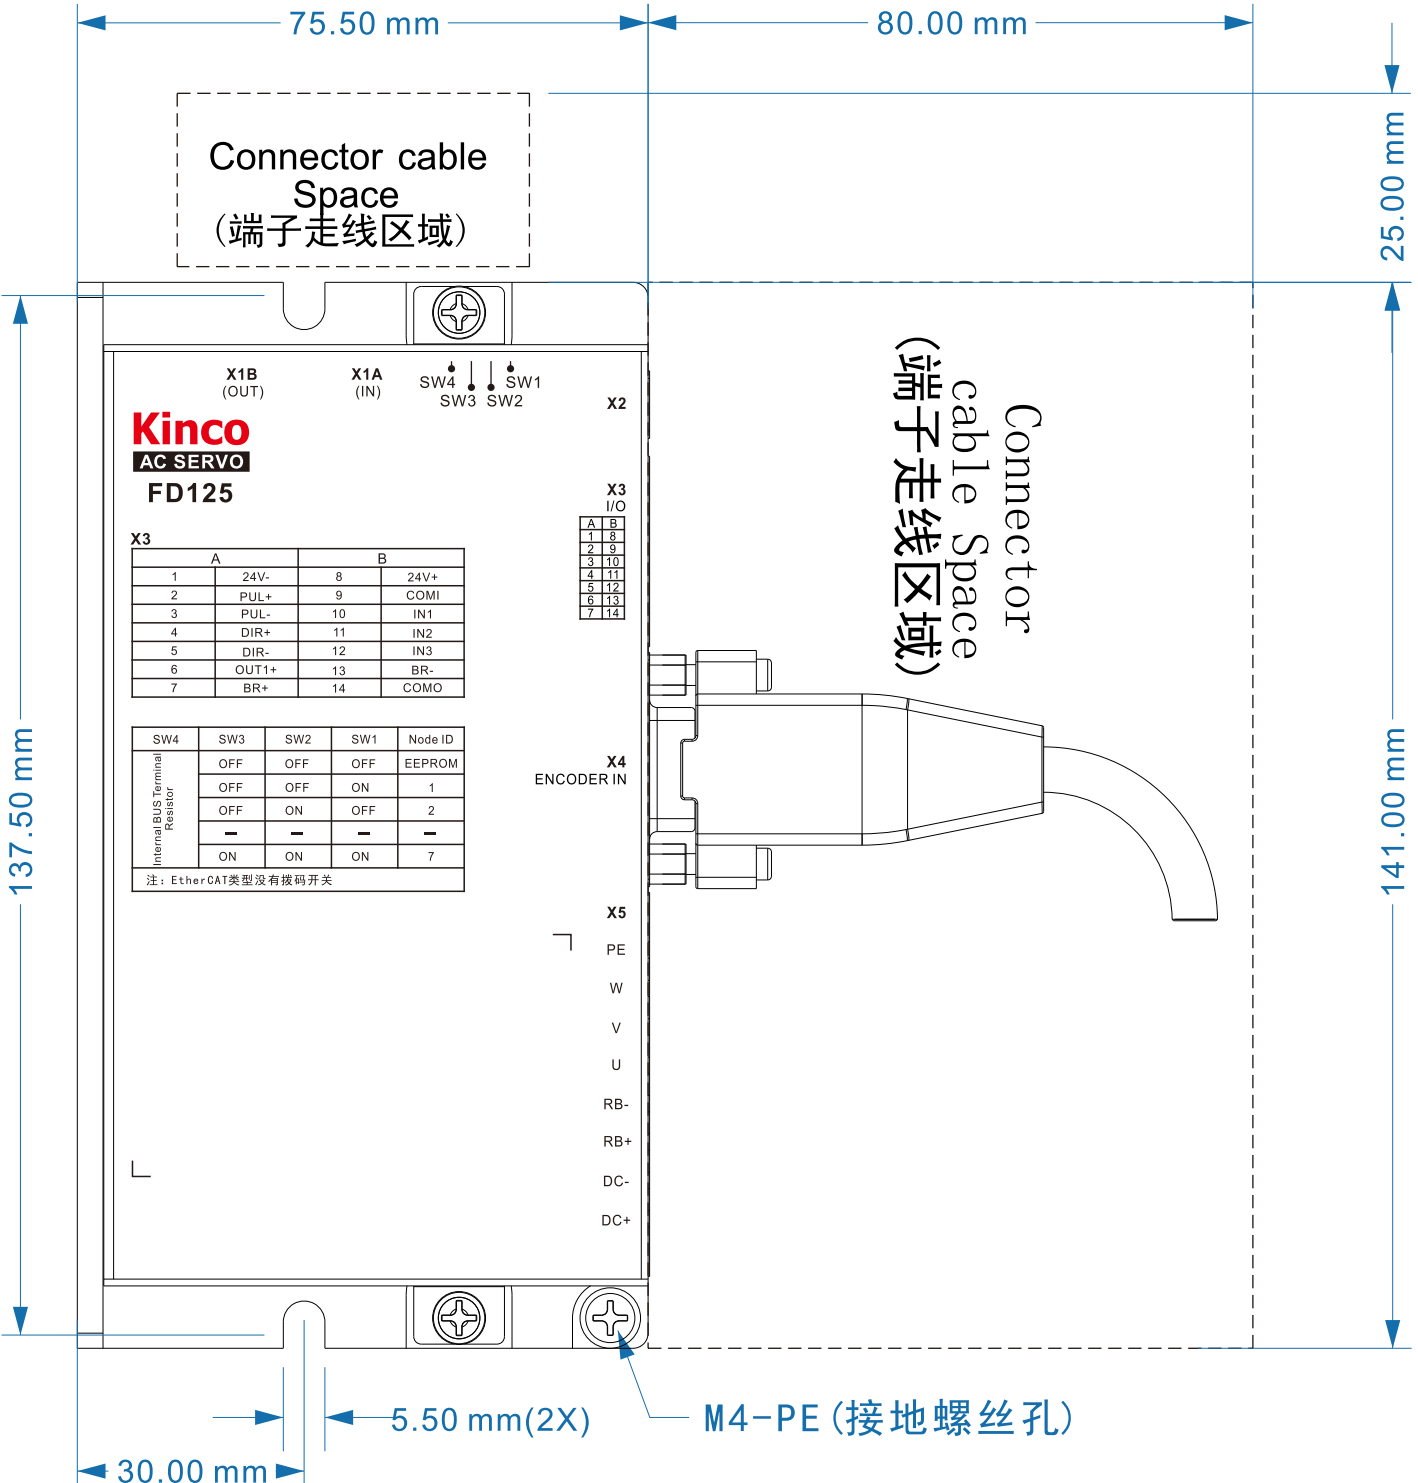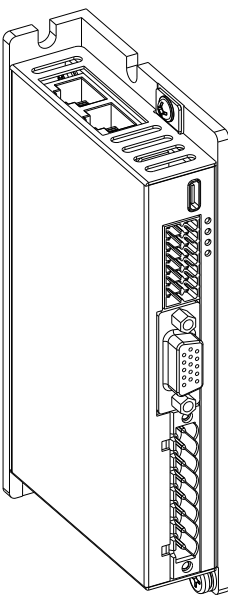



Kinco
AC SERVO
FD125

X3		X3	
A	B	A	B
1	24V-	8	24V+
2	PUL+	9	COMI
3	PUL-	10	IN1
4	DIR+	11	IN2
5	DIR-	12	IN3
6	OUT1+	13	BR-
7	BR+	14	COMO

SW4	SW3	SW2	SW1	Node ID
OFF	OFF	OFF	OFF	EEPROM
OFF	OFF	ON	ON	1
OFF	ON	OFF	OFF	2
—	—	—	—	—
ON	ON	ON	ON	7

注: EtherCAT类型没有拨码开关

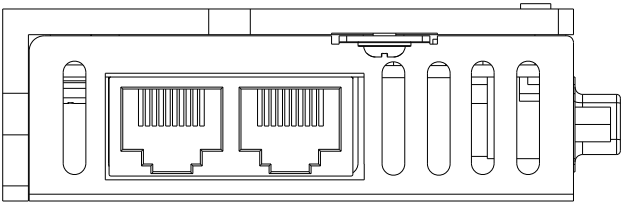

 DIMENSIONS IN MM				Material	XXXX			KINCO							
				Surface Treatment	XXXX										
				Tolerance	ISO 2768-mk										
XX	XXXX	XX	XX	Design	Zhou Yue		20250410		FD125-EX-Assembly Drawing_1V0						
XX	XXXX	XX	XX	Check	/		/								
1V0	首次出图	20250410	Zhou Yue	Confirm	/		/		NO.	XXXX					
Ver	Mark	Date	Name	Liner	/		Process	/		Scale	/	Qty	/	Weight	